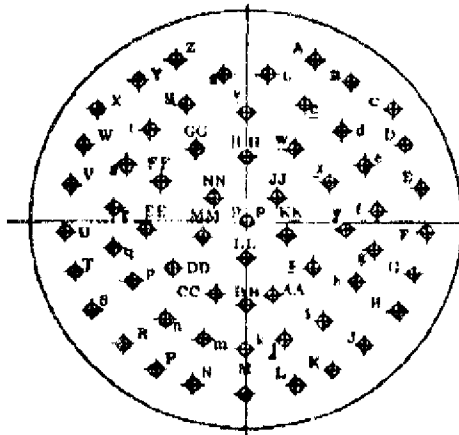
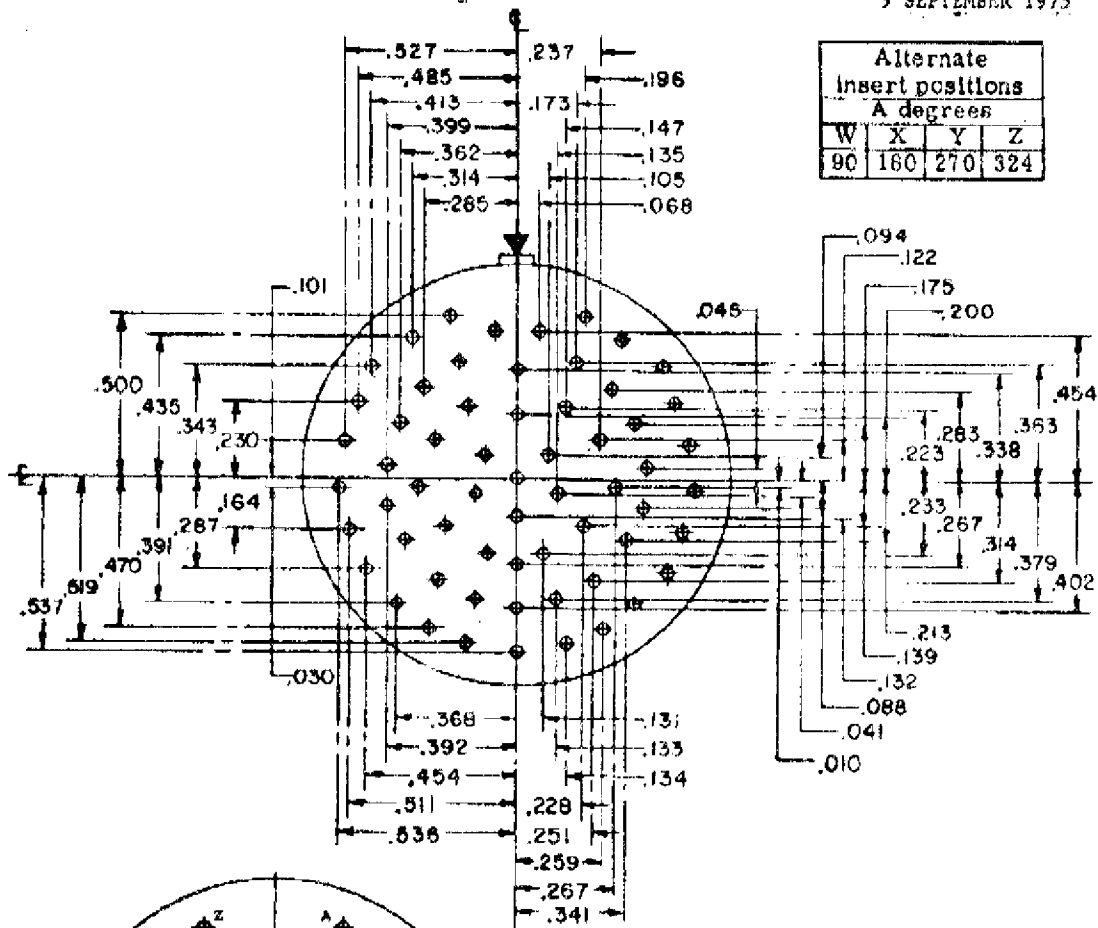


MIL-STD-1669
 5 SEPTEMBER 1975


INCHES	MM	INCHES	MM	INCHES	MM
.010	.25	.175	4.44	.362	9.19
.030	.76	.196	4.98	.363	9.22
.041	1.04	.200	5.08	.368	9.35
.046	1.17	.213	5.41	.379	9.63
.088	1.73	.223	5.66	.391	9.93
.088	2.23	.228	5.79	.392	9.97
.094	2.39	.230	5.84	.399	10.13
.101	2.57	.233	5.92	.402	10.21
.105	2.67	.237	6.02	.413	10.49
.122	3.10	.251	6.37	.435	11.05
.131	3.33	.259	6.58	.454	11.53
.132	3.35	.267	6.78	.470	11.94
.133	3.38	.283	7.19	.485	12.32
.134	3.40	.285	7.24	.500	12.70
.135	3.43	.287	7.29	.511	12.98
.139	3.53	.314	7.98	.519	13.18
.147	3.73	.338	8.58	.527	13.39
.164	4.17	.341	8.66	.536	13.61
.173	4.39	.343	8.71	.537	13.64

Shell size	Arrangement number	Number of contacts	Size contacts	Service rating	Contact location	Superseded document
24	61	61	20	I	All	MS33716-61