



KL-6884

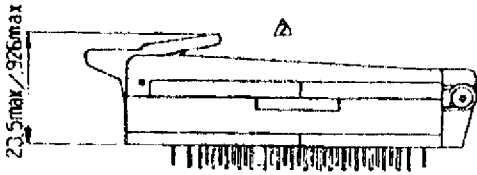


SIDE VIEW (out of scale)

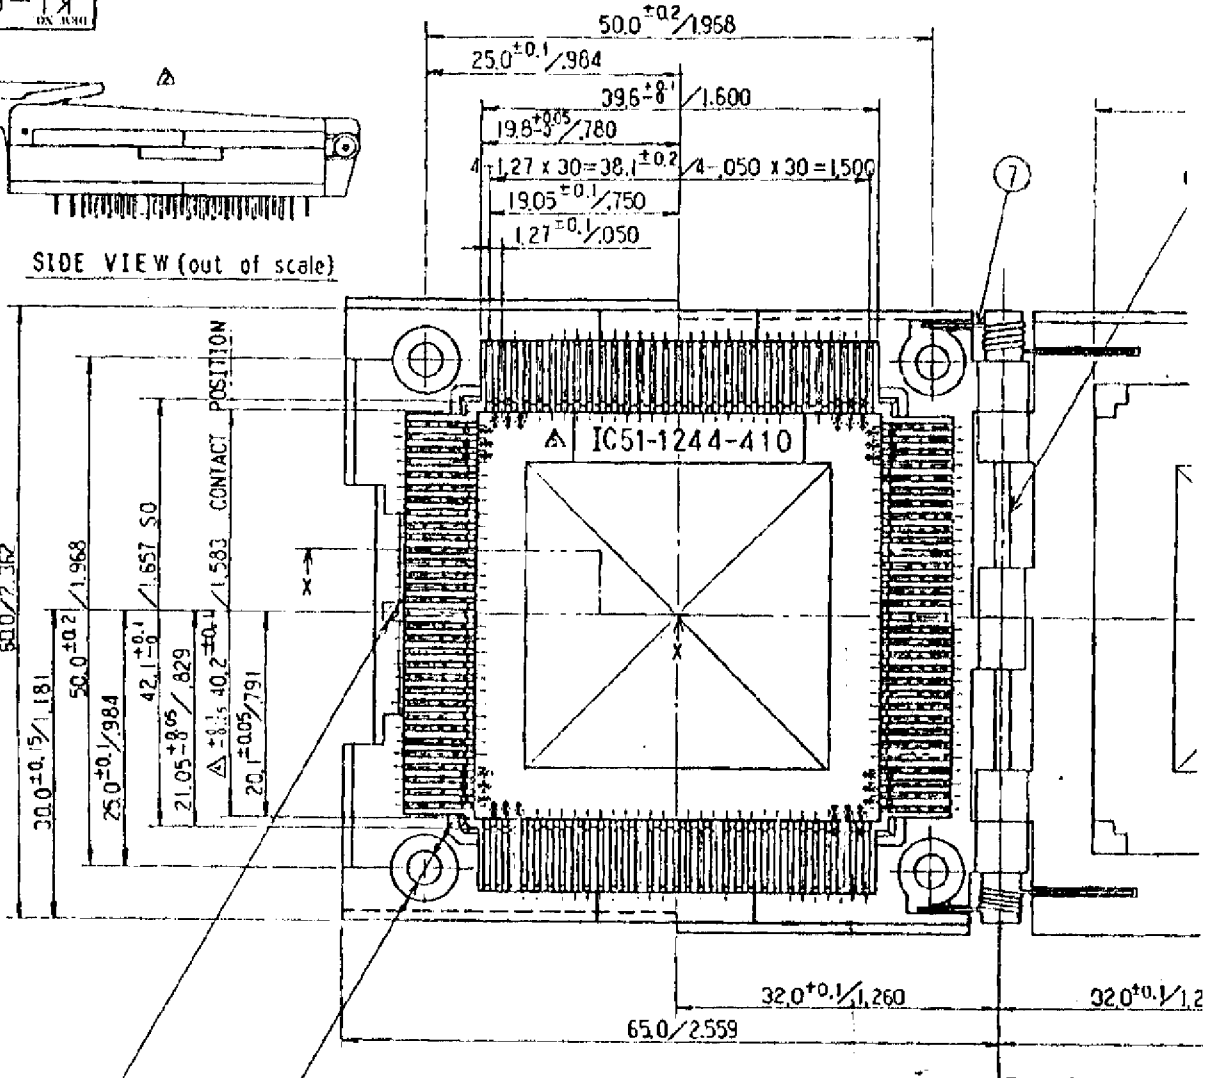

4-φ2.2穴、△φ6.4、深さ3.5/4-DIA .126 THRU SPOT FACING DIA .252 DEPTH .136

PIN NO.1 IDENTIFICATION

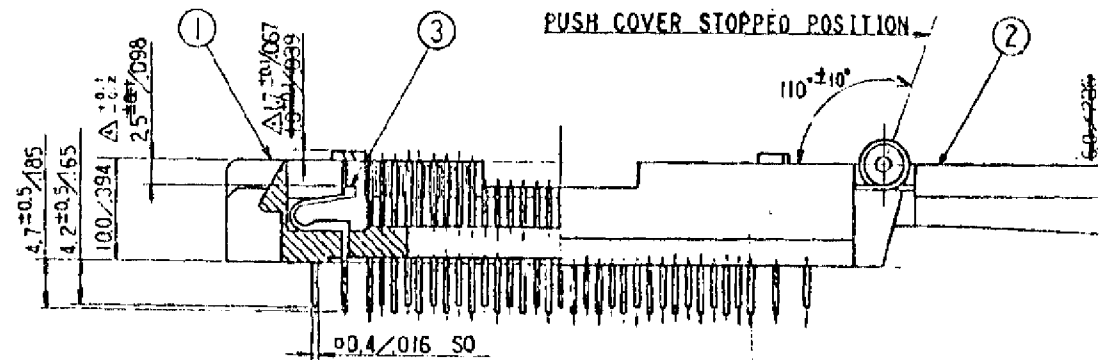

SECTION X-X

|     |                     |         |                              |
|-----|---------------------|---------|------------------------------|
| 7   | コイルばね COILED SPRING | 1 / 1   | MUSIC-WIRE SUS               |
| 6   | コイルばね COILED SPRING | 1       | MUSIC WIRE                   |
| △ 5 | シャフト M SHAFT-#18    | 2       | BRASS                        |
| 4   | ストッパ-O9 LATCH       | 1       | POLYETHERIMIDE GLASS F       |
| 3   | 接触片 C/T 298-1 A/B   | 62 / 62 | BERYLLIUM COPPER C1700R C0.4 |
| 2   | 押え板 PUSH COVER      | 1       | POLYETHERSULPHONE GLASS F    |
| 1   | 絶縁基板 INSULATOR      | 1       | POLYETHERSULPHONE GLASS F    |